


AUTOMATIC WATER SOFTENER VOLUMETRIC ISI5V

TECHNICAL FEATURES

Weight	11 kg
Power supply	230V 50/60 Hz
	optional 120V 60 Hz
Max flow rate suggested	1500 l/h
Room temperature	Min 4°C Max 35°C
Absorbed power	6 W
Salt quantity for regeneration cycle	0.6 kg
Salt refill	10 kg


THE PACKAGING CONTAINS:


- 1 Volumetric valve Autotrol 368
- 1 Brine tank
- 1 Vessel 5 litres with 3.5 litres cationic resins adapt for softening
- 1 Instruction manual
- 3 Metres of unloading pipe
- 1 Overflow curved union joint
- 1 Set of joints for water network connection
- 1 Grid

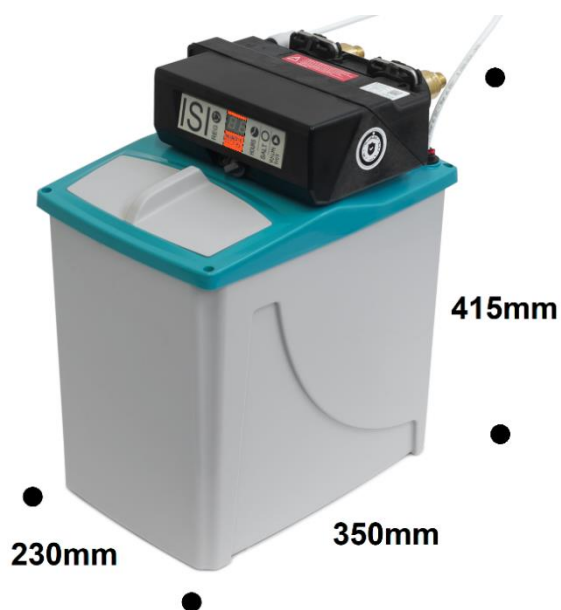

REMOVABLE IDRIC CONNECTION

The water connection are removable from the valve body

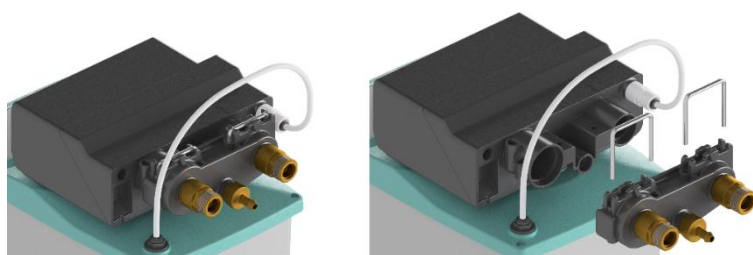

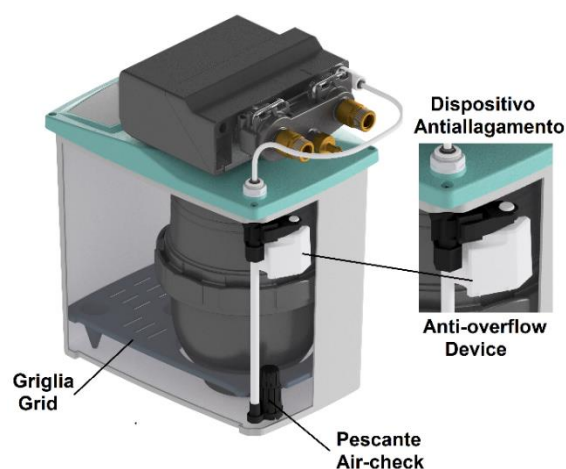

INFEEED WATER FEATURES

- Feed water must be:
- Drinkable and clean (SDI 1)
- Temperature must be between 6°C and 25°C
- Infeed water pressure Min 2 bar Max 8 bar
- Hardness must be below 900 ppm CaCO₃ (90°f)

LITRES OF SOFT WATER BASED ON WATER HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m ³ °f
°d	11	16	22	28	33	
ppm CaCO ₃	200	300	400	500	600	
ISI5V	1050	700	525	420	350	21.0

